

DECLARATION OF PERFORMANCE no.81

Type of product **Balcony profile STRAIGHT (PRIAMY)**

(1) **Product identification code:** Product group 39

(2) **Serial number:** 3961xx

(3) **Intended use:** Al profile is used for edge finishing of balconies and terraces with a completed screed fall.

(4) **Manufacturer:** Celox spol. s r. o., Záhradná 583/52, 900 23 Viničné

Declaration:

We hereby declare that for this product group there is no harmonized standard and therefore it is not subject to the CE standard.

(9) Declared parameters:

The parameters of the product are specified in technical sheet, which is an integral part of this declaration.

This declaration is issued at sole responsibility of the manufacturer specified in paragraph (4).

Ivan Fischer
managing director

Viničné, 1. 7. 2013

PRODUCT TECHNICAL SHEET

Balcony profile STRAIGHT (PRIAMY)

Short specification

Al balcony profile

Technical parameters

Length: 2.5 m

Color: natural, brown, grey

Material: Al, 1.3 mm thick

Overhang: 45 mm

Package: box 40 pcs., roll 5 pcs.

The recommended processing temperature is between + 5 °C to 35 °C.

Store in dry environment and in horizontal position - to prevent bending.

Material

ALUMINIUM (AL) natural

Al material: EN A W 6063 T66, Processing standard: ISO 2768-mk, Tolerance: EN 755-9



The oxidation layer or the darkening of the material results from the effects of air, moisture and alkaline substances. This may be removed with commercially available polishing preparations for this material. After cleaning, these effects may reappear on the surface.

ALUMINIUM (AL) RAL

Pulverization of aluminum profiles is performed with the most modern lines that are environmentally friendly. It is the most common method for surface finishing. Provided coating results in highly aesthetic appearance, a perfect elasticity and abrasion resistance. It provides excellent protection of interior and exterior items. A wide selection of colors is in accordance with RAL sampler card. Properties of powder coating: excellent weather resistance, good formability (profiles can be shaped even after applying of the powder), high resistance to UV radiation and corrosion, the possibility of repeated application of a new coating color.

Application

Balcony profile STRAIGHT (PRIAMY) - is a finishing profile with adjustable drip edge from 10 to 30 mm for installation on finished screed fall. It is used primarily in cases where it is not possible to use a different profile due to insufficient space between the trailing edge of the balcony and the railing bracket. The finishing edge height is 10 mm. With the use of sealed edges we get a clean and perfect finish of tiling. It is suitable for design compositions with one or two component elastic hydro insulation or separation foil CS. Profile can be combined with balcony profile FLEXI.

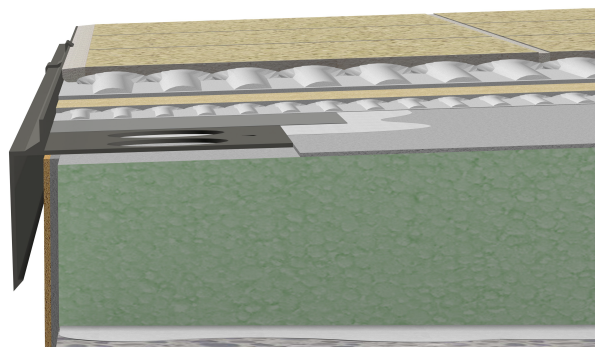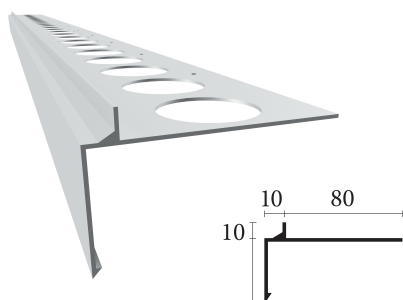

Note: Technical sheet and information specified therein result from our verified tests, long-term experience, knowledge and field use. Celox spol. s r.o. is not responsible for damages caused by incorrect use of the product. Subject to changes.